查询C380DX555供应商

C380_ _X555

Powerex, Inc., 200 Hillis Street, Youngwood, Pennsylvania 15697-1800 (412) 925-7272
Powerex, Europe, S.A. 428 Avenue G. Durand, BP107, 72003 Le Mans, France (43) 41.14.14

Phase Control SCR
300 Amperes Average
1300 Volts

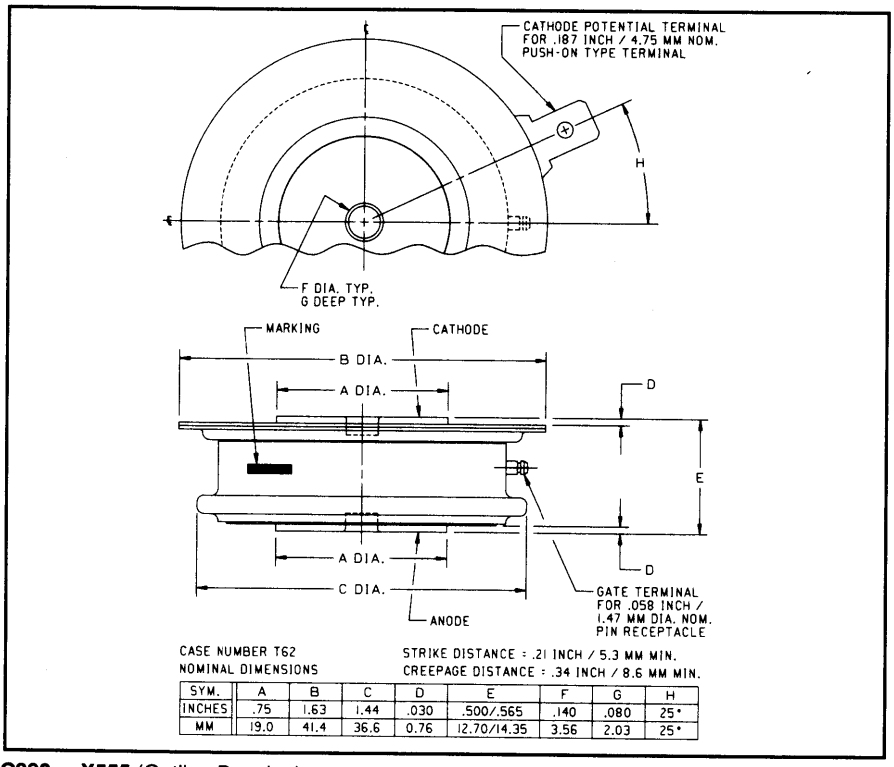

SYM.	A	B	C	D	E	F	G	H
INCHES	.75	1.63	1.44	.030	.500/.565	.140	.080	25°
MM	19.0	41.4	36.6	0.76	12.70/14.35	3.56	2.03	25°

C380_ _X555 (Outline Drawing)

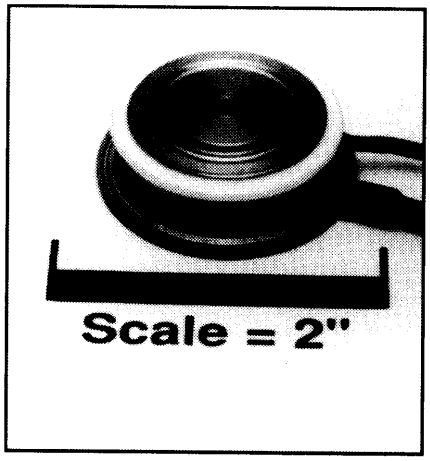

C380_ _X555 Phase Control SCR
300 Amperes Average, 1300 Volts

Description:
Powerex Silicon Controlled Rectifiers (SCR) are designed for phase control applications. These are all-diffused, Press-Pak (Pow-R-Disc) devices employing the field-proven amplifying (di/namic) gate.

Features:
- ☐ Low On-State Voltage
- ☐ High di/dt
- ☐ High dv/dt
- ☐ Hermetic Packaging
- ☐ Excellent Surge and I^2t Ratings
- ☐ High Temperature Operation

Applications:
- ☐ Power Supplies
- ☐ Battery Chargers
- ☐ Motor Control

Ordering Information:
Select the complete nine or ten digit part number you desire from the table, i.e. C380PCX555 is a 1300 Volt, 300 Ampere Phase Control SCR.

Type	Voltage V_{DRM} V_{RRM}	Code	Current $I_{T(av)}$
C380_ _X555	400	D	300
	600	M	
	800	N	
	1000	P	
	1200	PB	
	1300	PC	

Powerex, Inc., 200 Hillis Street, Youngwood, Pennsylvania 15697-1800 (412) 925-7272
Powerex, Europe, S.A. 428 Avenue G. Durand, BP107, 72003 Le Mans, France (43) 41.14.14

C380_ _X555
Phase Control SCR
300 Amperes Average, 1300 Volts

Absolute Maximum Ratings

	Symbol	C380__X555	Units
RMS On-State Current @ T_C = 85°C	$I_{T(RMS)}$	450	Amperes
Average On-State Current @ T_C = 85°C	$I_{T(av)}$	300	Amperes
Peak One-Cycle Surge (Non-Repetitive) On-State Current (60Hz)	I_{TSM}	3200	Amperes
Peak One-Cycle Surge (Non-Repetitive) On-State Current (50Hz)	I_{TSM}	2900	Amperes
Critical Rate-of-Rise of On-State Current (Non-Repetitive)	di/dt	600	Amperes/μs
Critical Rate-of-Rise of On-State Current (Repetitive)	di/dt	300	Amperes/μs
I^2t (for Fusing), 8.3 milliseconds	I^2t	42,000	A^2sec
Peak Gate Power Dissipation	P_{GM}	10	Watts
Average Gate Power Dissipation	$P_{G(av)}$	2	Watts
Storage Temperature	T_{STG}	−40 to 150	°C
Operating Temperature	T_J	−40 to 150	°C
Mounting Force		720 to 880	lb.
Mounting Force		3.2 to 3.92	kN

Electrical and Thermal Characteristics

Characteristics	Symbol	Test Conditions	C380__X555	Units
Voltage—Blocking State Maximums				
Forward Leakage, Peak	I_{DRM}	T_J = 150°C, V = V_{DRM}	45	mA
Reverse Leakage, Peak	I_{RRM}	T_J = 150°C, V = V_{RRM}	45	mA
Current—Conducting State Maximums				
Peak On-State Voltage	V_{TM}	I_{TM} = 1500A Peak, T_C = 25°C	2.85	Volts
Switching				
Typical Turn-Off Time	t_q	T_J = +150°C, I_{TM} = 250 Amperes, V_R = 50 Volts Minimum, V_{DRM} (Reapplied), Rate-of-Rise of Reapplied Off-State voltage = 20 Volts/μsec (Linear) Gate Bias During Turn-off Interval = 0 Volts, 100Ω. Duty Cycle ≤0.01%	75	μsec
Typical Delay Time	t_d	T_C = +25°C, I_T = 100 Adc, V_{DRM} = Rated Gate Supply: 10 Volt Open Circuit, 25 ohm, 0.1 μsec maximum rise time	1.0	μsec
Min. Critical dv/dt exponential to V_{DRM}	dv/dt	T_J = 150°C, Gate Open	200	V/μsec
Thermal				
Maximum Thermal Resistance, double sided cooling				
Junction to Case	$R_{\theta JC}$		0.095	°C/Watt
Case to Sink, Lubricated	$R_{\theta CS}$		0.02	°C/Watt
Gate—Maximum Parameters				
Gate Current to Trigger	I_{GT}	T_C = 25°C, V_D = 6Vdc; R_L = 3Ω	150	mA
Gate Voltage to Trigger	V_{GT}	T_C = −40°C to 150°C, V_D = 6 Vdc, R_L = 3Ω	3	Volts
Non-Triggering Gate Voltage	V_{GDM}	T_J = 150°C, R_L = 1000Ω, Rated V_{DRM}	0.15	Volts
Peak Forward Gate Current	I_{GTM}		10	Amperes
Peak Reverse Gate Voltage	V_{GRM}		5	Volts

Powerex, Inc., 200 Hillis Street, Youngwood, Pennsylvania 15697-1800 (412) 925-7272
Powerex, Europe, S.A. 428 Avenue G. Durand, BP107, 72003 Le Mans, France (43) 41.14.14

C380_ _X555
Phase Control SCR
300 Amperes Average, 1300 Volts

MAXIMUM ON-STATE CHARACTERISTICS

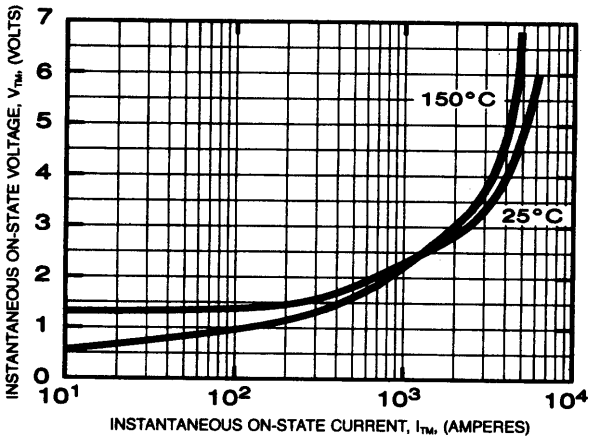

TRANSIENT THERMAL IMPEDANCE CHARACTERISTICS (JUNCTION TO CASE)

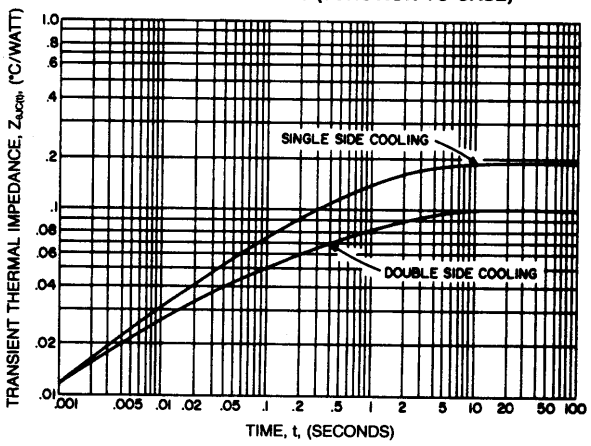

MAXIMUM ALLOWABLE CASE TEMPERATURE (SINUSOIDAL WAVEFORM)

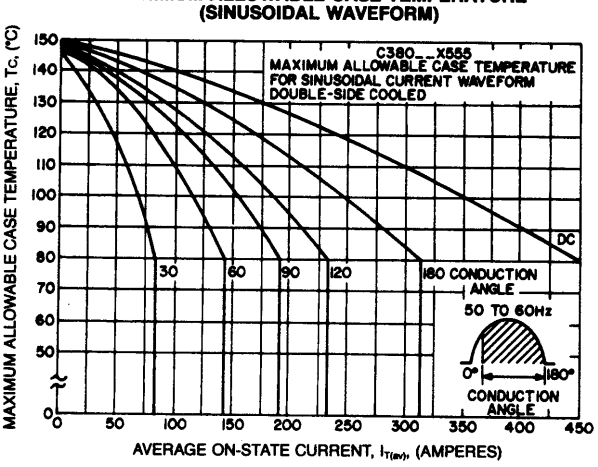

MAXIMUM ON-STATE POWER DISSIPATION (SINUSOIDAL WAVEFORM)

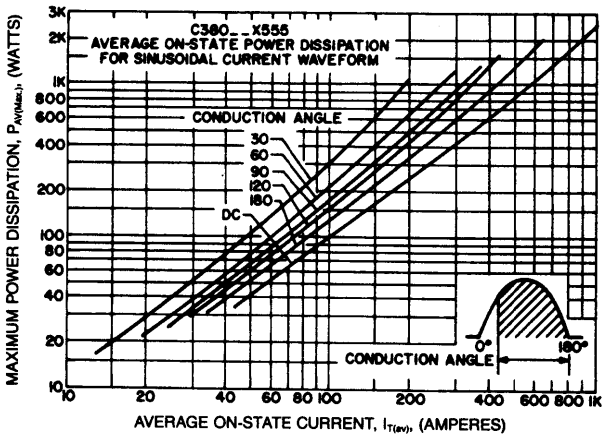

MAXIMUM ALLOWABLE CASE TEMPERATURE (RECTANGULAR WAVEFORM)

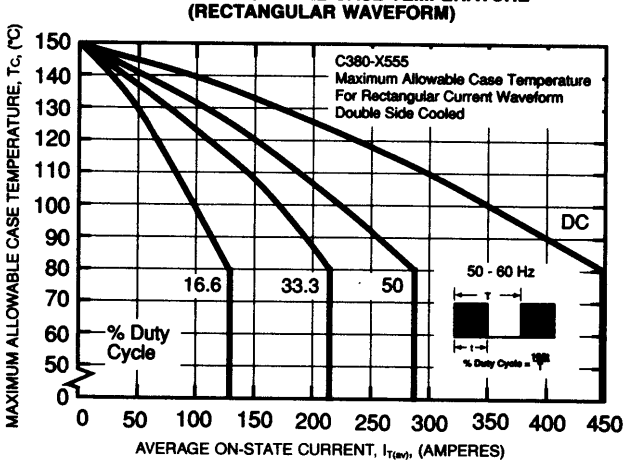

MAXIMUM ON-STATE POWER DISSIPATION (RECTANGULAR WAVEFORM)

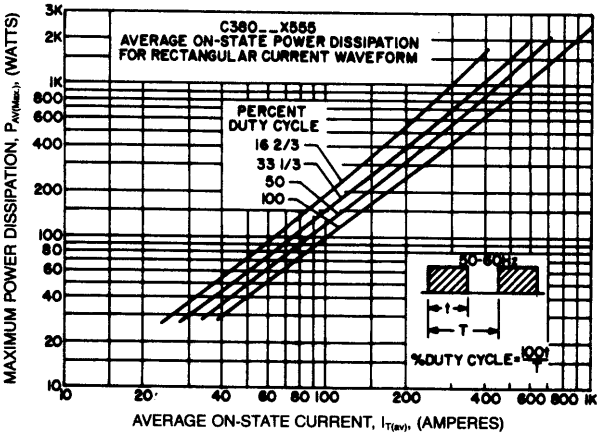

Powerex, Inc., 200 Hillis Street, Youngwood, Pennsylvania 15697-1800 (412) 925-7272
Powerex, Europe, S.A. 428 Avenue G. Durand, BP107, 72003 Le Mans, France (43) 41.14.14

C380_ _X555
Phase Control SCR
300 Amperes Average, 1300 Volts

MAXIMUM ALLOWABLE CASE TEMPERATURE (SINUSOIDAL WAVEFORM)

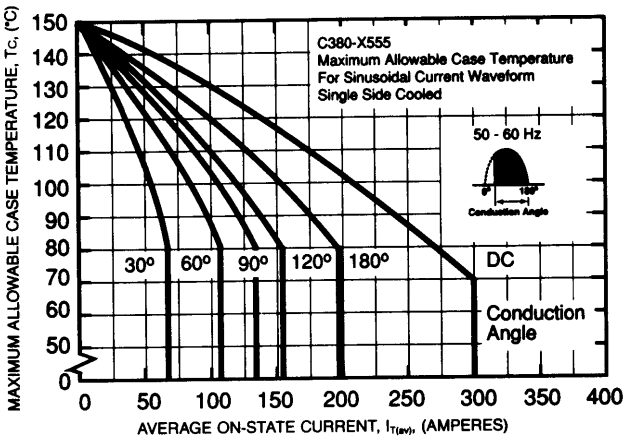

MAXIMUM ALLOWABLE CASE TEMPERATURE (RECTANGULAR WAVEFORM)

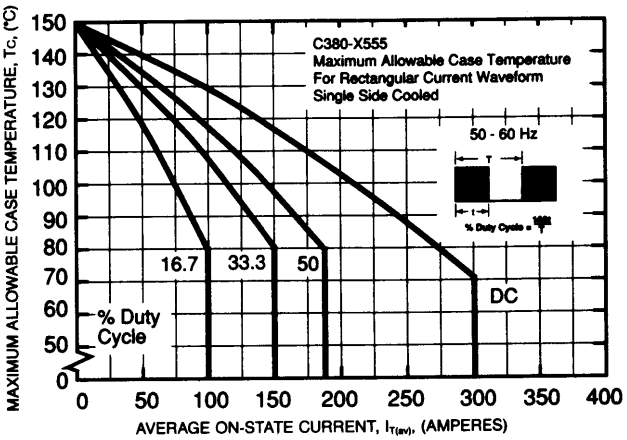

SUB-CYCLE SURGE AND I^2t RATINGS (RATED LOAD CONDITIONS)

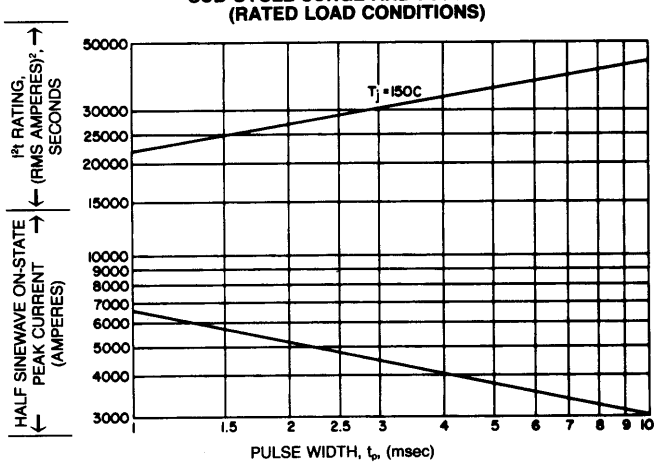

MAXIMUM ALLOWABLE SURGE ON-STATE CURRENT (NON-REPETITIVE)

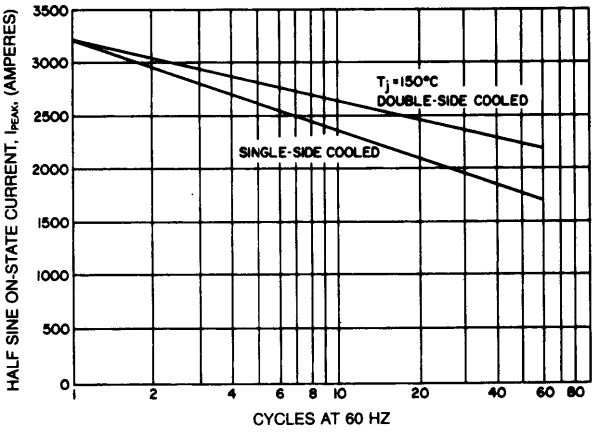

GATE CHARACTERISTICS

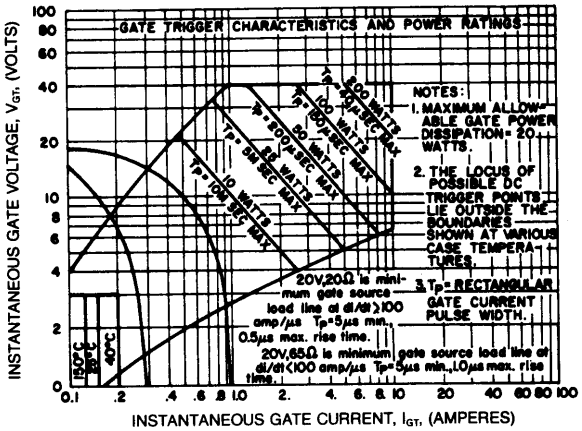
GATE TRIGGER CHARACTERISTICS AND POWER RATINGS
INSTANTANEOUS GATE VOLTAGE, V_{GT}, (VOLTS)
NOTES:
1. MAXIMUM ALLOWABLE GATE POWER DISSIPATION = 20 WATTS.
2. THE LOCUS OF POSSIBLE DC TRIGGER POINTS LIE OUTSIDE THE BOUNDARIES SHOWN AT VARIOUS CASE TEMPERATURES.
3. Tp = RECTANGULAR GATE CURRENT PULSE WIDTH.
20V,20Ω is minimum gate source load line at di/dt ≥100 amp/µs Tp=5µs min., 0.5µs max. rise time.
20V,65Ω is minimum gate source load line at di/dt<100 amp/µs Tp=5µs min.,1.0µs max. rise time.
INSTANTANEOUS GATE CURRENT, I_{GT}, (AMPERES)

NOTES:
1. Maximum allowable gate power dissipation = 2 watts.
2. The locus of possible DC trigger points lie outside the boundaries shown at various case temperatures.
3. Tp = Rectangular Gate Current Pulse Width.